



BEDIENUNGSANLEITUNG

S00-50104-252
Anbauleuchte FOX

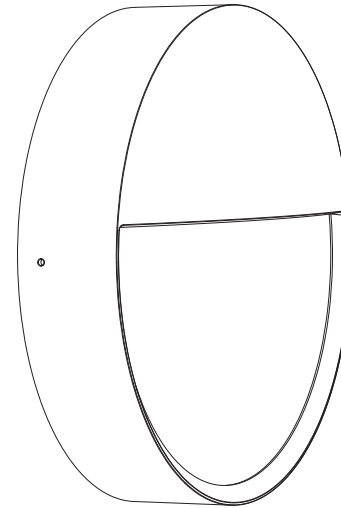

Dieses Produkt enthält eine Lichtquelle
der Energieeffizienzklasse **<D>**.



Safety Instructions


To ensure correct function and safety, please read and follow all instructions carefully before using the product:

1. Turn off power supply before installation or before doing any maintenance work.
2. Do not install any luminaire near the heat source.
3. IP grade please refer to product label, only IP65 can be used in damp locations.
4. Do not exceed the nominal supply voltage or amperage ratings.
5. Dimmable version could be compatible with a wide range of recommended TRIAC dimmers.
6. All wiring and installation of the light fitting must adhere to local and national wiring rules.
7. Take care not to pull any electrical wires during unpacking as this may damage the connection.
8. Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
9. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.
10. Please keep instructions for future reference.

Installation Procedure


WARNING

1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.




Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.

Step 1




Take out the lamp and accessory.

Step 2




Make the frame, diffuser and back housing separately.

Step 3




Fix the back housing on the wall or ceiling by screws.

Step 4




Choose the color temperature with DIP switch if it's the color changeable version, then connect the wires well.

Step 5




Connect the DC plug(if with Emergency , connect the plugs between the battery and driver), put back the cover to the back plate and fix it by screws

Step 6



Buckle the frame back and fix it by proper tools.

Step 7

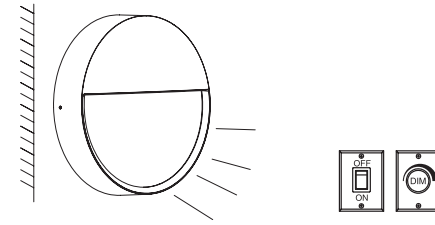

Installation finished, turn on the switch.

Functions Instruction (For specific function, please refer to actual model)




Emergency

Emergency function switches automatically between power cut and power restoration.

- Li battery, high efficiency
- Battery duration: 3 hours
- Charge period: 24 hours

Wiring Diagram:

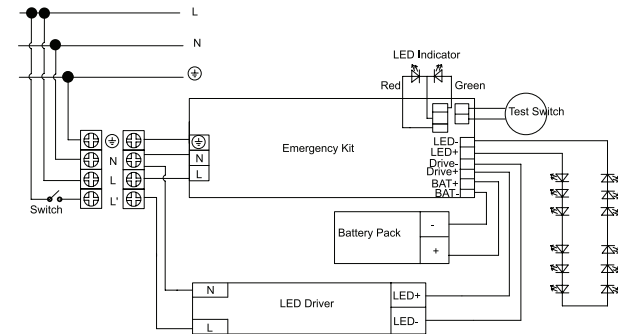

Instructions for automatic test option

1. Once the unit is powered up it will automatically initiate a self test and diagnostics as follows:

- Every 4seconds: Check for battery disconnection, charger board fault, lamp failure and transformer failure.
- Every month: Perform a 3minute duration test.
- Every year: Perform a 1 Hour or 3 Hours duration test.
- Automatic test status: Connect the battery, start timing after L' and N connected with mains supply; Memory test time within 7 days available when the mains supply stopped.

All test functions are factory preset and do not need field adjustment.

2. Dual Colour Indicator LED Status Mesnings

- Green Solid On Ready/Normal Operation
- Red Requires Service

•	One flash, 4 second pause	Battery not connected
••	Two flashes, 4 second pause	Battery short or low battery voltage
•••	Three flashes, 4 second pause	Charger board fault
••••	Four flashes, 4 second pause	Transformer fault
•••••	Five flashes, 4 second pause	LED lamp fault

NOTE: After repairing a service fault, press and hold the test button for 2 seconds to reset the flashing indicator light to green.

3. Manual Test

Press test button once	30 second duration test
Press test button twice within 2 seconds	3 minute duration test
Press test button 3 times within 2 seconds	30 minutes duration test
Press test button 4 times within 2 seconds	1 or 3 hours duration test