

# GLOW®

## SIMPLY LIGHT

### Pendelleuchte BIGMOON

#### 500-39050-060

Speisung 230V 50Hz  
Leistung LED 48W  
Lichtstrom 4200lm  
Lichtfarbe 3000K  
Dimmbar DALI  
Masse aussen Ø600mm

#### 500-39051-060

230V 50Hz  
LED 48W  
4200lm  
4000K  
DALI  
Ø600mm

#### 500-39050-080


230V 50Hz  
LED 63W  
5100lm  
3000K  
DALI  
Ø800mm

#### 500-39051-080


230V 50Hz  
LED 63W  
5100lm  
4000K  
DALI  
Ø800mm




Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse <F>.



### INSTALLATION

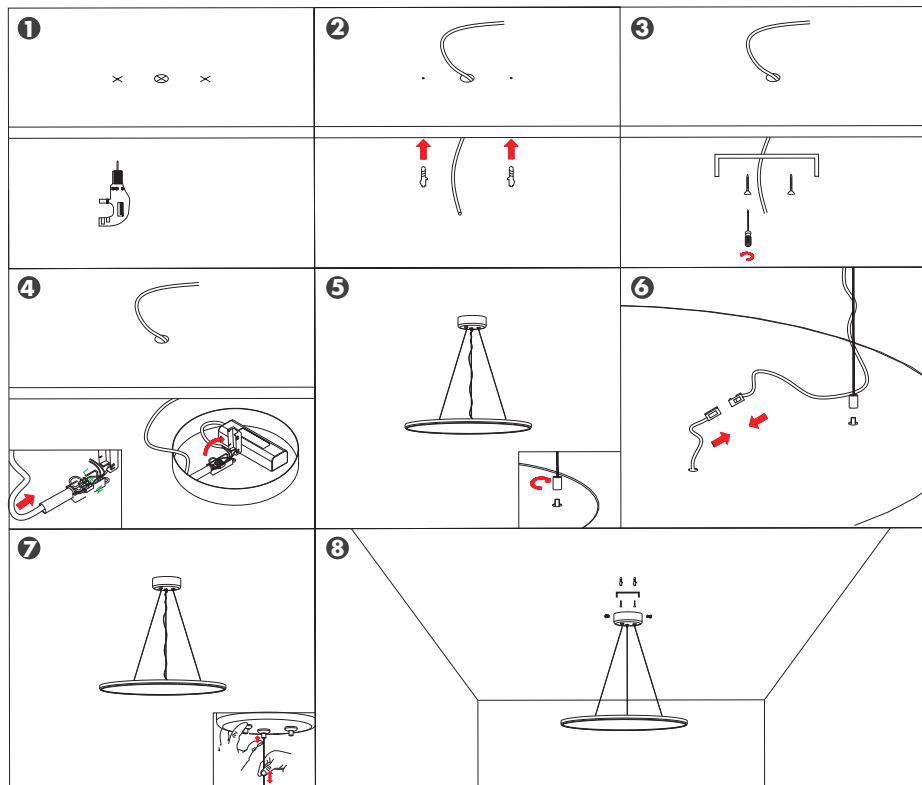

### LICHTVERTEILUNGSKURVE

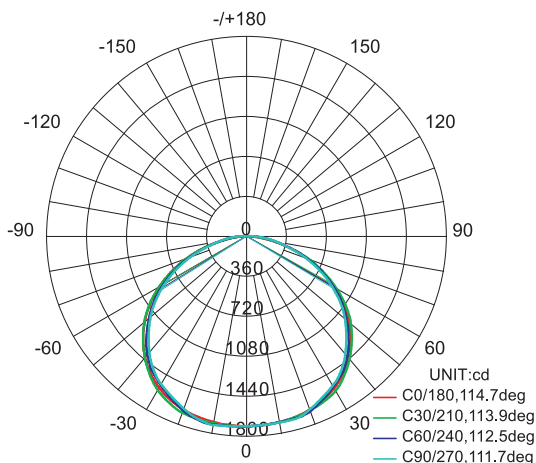

Durchschnittlicher Strahlungswinkel (10%)\_ 112.36 DEG

- Please read the specification first, to make sure the environment matches the condition in the specification before using.
- Please confirm the applicable power supply before using.
- Make sure the switch of product is off before connecting to the power supply to prevent electric shock.
- Operation against rules may damage your property and even harm your personal safety.
- Preliminarily estimate required quantity of Round Recessed Flat Panel Light, then according to the power rating of single light to figure out the total power and design power supply plan.
- Dangerous high voltage, Non-professionals are not allowed to maintain the products.
- If the exterior flexible cable or wire is damaged, it must exchange by the supplier, its agent or other similar qualified personnels to avoid dangers.